

LAND CORNER RECORD

Index: S-10	Corner: NW1/16			State of Indiana - Hoosier National Forest
Section: 28	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe
Coordinate:	Lat./N: 1373053.50	Long./E: 3141303.86		Datum: NAD83 IN West Zone, US Survey Feet


CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:		Monument Photograph:
1990	Ken Anderson	A 3-1/4" stamped aluminum monument set	USDA Forest Service Bedford, IN		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
Record evidence of prior survey:					
2.) Date of Survey:	Surveyor:	Monument:	Recording Information:		
11/23/2004	Robert Stone USFS Survey Tech	A 3-1/4" stamped aluminum monument fd.	USDA Forest Service Bedford, IN		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	S. Oak	17"	N34°W	17.90'	
	C. Oak	28"	S25°E	4.40'	
Record evidence of prior survey:	3-1/4" stamped aluminum monument fd. set by Ken Anderson in 1990				

ACCESSORIES: Bearing and distance from monument to witness object.


Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Red Oak	21"	N32°W	18.58'
	Rock Chestnut Oak*	31"	S25°E	3.96'
	Sugar Maple	11"	N52°W	15.85'
* = tag and mag only				
Monument Found or Set:	A 3-1/4" aluminum monument stamped "T7N R1E NW1/16 S.28 1990 S0545" was found 0.3' above grade.			

MONUMENT SKETCH




NARRATIVE REFERENCE:

Monument is a 3-1/4" aluminum monument stamped "T7N R1E NW1/16 S.28 1990 S0545" found 0.3' above grade, a carsonite post is located 1.0' west of the monument, located 96' west of Chapel Hill Road, 2' north of an east-west treeline, 40' south of a small pine stand, S60°W 120' from a paved parking area, mound row is visible to the west, S30°W +/- 350' of a two story house, surrounded by mature forest.

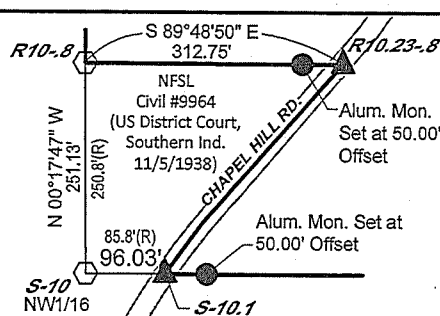

SECTION DIAGRAM



Corner Location =

PERPETUATION RECORD:

The record monument was found undisturbed and maintained by remarking one existing bearing tree, marking one existing bearing tree with a tag and mag nail only, and establishing one new bearing tree. The two existing bearing trees were recovered from a Land Corner Record by Robert Stone, dated 11/23/2004.

Two bearing trees were marked with a blaze, scribed B.T., bearing tree sign, paint, and mag nail and one existing bearing tree was marked with a tag and mag nail only.

Referenced on BRCJ survey recorded as InstNo.2018004724.

Accepted by the Monroe County Surveyor Review Board on August 6, 2019.

Section: 28 T7N R1E	Prepared By: BRCJ (Project#3-0821)	Date: 3/2018
---------------------	------------------------------------	--------------

Index:	S-10	Corner:	NW 1/16	LAND CORNER RECORD				State of Indiana Hoosier National Forest
Twnshp:	7N	Range:	1E	Section:	28	2 nd P.M.	County	Monroe
EXISTING SURVEYS								
Original Government Survey					Original Survey Evidence Found			
Year Surveyed:		By:		Date of Search:		By:		
Original Monument:				Monument Found:				
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance	
Subsequent Corner Restoration					Evidence of Subsequent Corner Restoration Found			
Where Filed or Recorded:				Year Searched:	11/10/04	By:	B.Stone	
Book:	Page:	Date:		Monument Found	2 1/2" diameter aluminum FS monument with 3 1/4" diameter aluminum cap standing 4" above the ground and stamped as shown:			
Monument Set:								
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance	

OTHER EVIDENCE

Describe corner loc. relative to nearby features & dir. to corner location; note fences, roads, etc.	Sketch of Monument
The monument is located approximately 70 feet northwest of Chapel Hill Road on the ridgetop. A 2 car parking area on the northwest side of the road is approximately 180 feet N 55°E. A pine stand is 35 feet north. The monument is on the north side of a east-to-west moundrow. On the east side of the road, a treeline runs east with an open field north of it.	

PERPETUATION RECORD

Monument: Describe new monument set or work done to perpetuate/preserve the existing monument/position.									
									
Corner Diagram		Accessories: Describe new BTs & witness objects established to perpetuate existing evidence.							
		These trees are not tagged or blazed: <table style="width:100%;"> <tr> <td style="width:50%; text-align: center;">S. Oak 17" N 34°W 17.9 Ft.</td> <td style="width:50%; text-align: center;">C. Oak\ 28" S 25°E 4.4 Ft.</td> </tr> </table>						S. Oak 17" N 34°W 17.9 Ft.	C. Oak\ 28" S 25°E 4.4 Ft.
S. Oak 17" N 34°W 17.9 Ft.	C. Oak\ 28" S 25°E 4.4 Ft.								
Section: 28		Corner Recordation:				Certificate Prepared:			
		Filed and Recorded in County records:				Date:			
		Book:				Page:			
		Geodetic Coordinates:		Lat./N.				Long./E.	
		Edited By:		Robert J. Stone		Date Created:		11/23/04	